



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 901 853 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.03.1999 Bulletin 1999/11

(51) Int. Cl.⁶: B22D 21/00, B22D 17/14

(21) Application number: 98115778.7

(22) Date of filing: 21.08.1998

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Colvin, Gregory N.
Muskegon, Michigan 49445 (US)

(74) Representative:
Hoeger, Stellrecht & Partner
Uhlandstrasse 14 c
70182 Stuttgart (DE)

(30) Priority: 12.09.1997 US 928842

(71) Applicant:
Howmet Research Corporation
Whitehall, Michigan 49461 (US)

(54) High vacuum die casting

(57) Apparatus and method for die casting a metal or alloy wherein the metal or alloy is melted in a vacuum chamber (40) disposed about an end of a shot sleeve (24). The opposite end of the shot sleeve is communicated to a die cavity between first and second dies (32,34) which are disposed in ambient air atmosphere. The dies have one or more vacuum seals (60) therebetween extending about the die cavity to isolate the die cavity from the ambient air atmosphere when the dies

are closed. A vacuum thereby is provided in the die cavity through the shot sleeve when the vacuum chamber is evacuated despite the dies being disposed in ambient air atmosphere. The first and second dies are opened after the metal or alloy is die cast in the die cavity for ready removal of the cast component from the die cavity directly to the ambient air atmosphere and then to an optional quenchant medium proximate the dies.

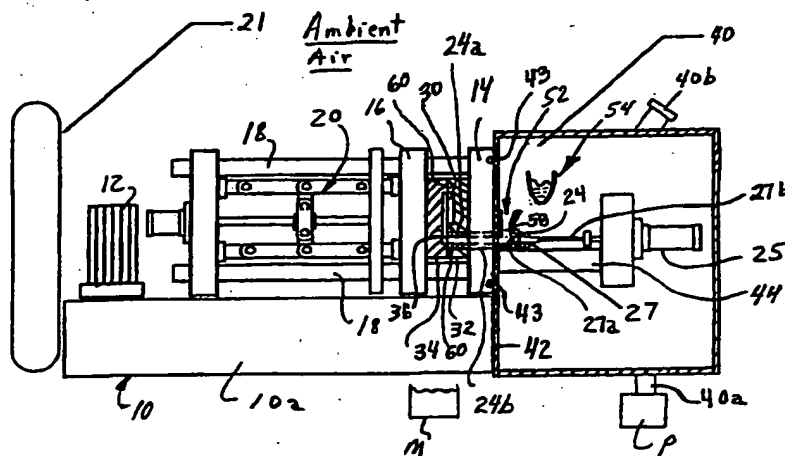


Figure 1

EP 0 901 853 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to die casting of metals and alloys and, more particularly, to vacuum die casting of metals and alloys under relatively high vacuum die cavity conditions.

BACKGROUND OF THE INVENTION

[0002] Titanium, titanium based alloy, nickel based alloy, and stainless steel castings are used in large numbers in the aerospace industry. Many such castings are made by the well known investment casting process wherein an appropriate melt is cast into a preheated ceramic investment mold formed by the lost wax process. Although widely used, investment casting of complex shaped components of such reactive materials can be characterized by relatively high costs and low yields. Low casting yields are attributable to several factors including surface or surface-connected, void type defects and/or inadequate filling of certain mold cavity regions, especially thin mold cavity regions, and associated internal void, shrinkage and like defects.

[0003] Lower cost casting of reactive metals and alloys such as titanium and titanium and nickel based alloys using permanent, reusable, multi-part metal molds based on iron and titanium is described in Colvin U.S. Patent 5 287 910. Casting of aluminum, copper, and iron based castings using permanent metal molds is described in U.S. Patent 5 119 865.

[0004] It is an object of the present invention to provide die casting apparatus and method for casting metals and alloys, especially metals and alloys reactive to oxygen, under relatively high vacuum die cavity conditions.

[0005] It is another object of the present invention to provide die casting apparatus and method for casting metals and alloys under relatively high vacuum die cavity conditions followed by removal of the die cast components from the dies to the ambient atmosphere and quenching of the components in a quenchant medium proximate the dies.

SUMMARY OF THE INVENTION

[0006] The present invention provides apparatus and method for die casting a metal or alloy wherein the metal or alloy is melted in a vacuum chamber disposed about an end of a shot sleeve. The shot sleeve includes an opposite end communicated to a die cavity defined between first and second dies that are located outside the vacuum chamber in ambient air atmosphere. One or more high temperature vacuum seals is/ar provided between the dies about the die cavity such that a vacuum is provided in the die cavity through the shot sleeve when the vacuum chamber is evacuated. The first and

second dies are opened after the metal or alloy is die cast in the die cavity followed by removal of the cast component from the die cavity directly to the ambient atmosphere or to an optional quenchant medium proximate the dies.

[0007] The present invention envisions in one embodiment evacuating the die cavity to a vacuum level of less than 1000 microns through the shot sleeve, introducing a reactive molten metal or alloy, such as a titanium, titanium based alloy, nickel based superalloy, and iron based alloy, into the shot sleeve in the vacuum melting chamber preferably in an amount that occupies less than 40 volume %, such as about 8 to about 15 volume %, of the effective internal shot sleeve volume, and then advancing the plunger to inject the reactive molten metal or alloy into the sealed, evacuated die cavity where at least the outer surface of the cast component can solidify before opening of the dies to break the vacuum seal(s) and expose the cast component to ambient air atmosphere for removal from the die and optional quenching in a quenchant medium.

[0008] The present invention envisions in another embodiment placing a plug in the shot sleeve prior to introduction of the metal or alloy located downstream of the shot sleeve melt inlet such that the plug improves filling of the shot sleeve with the proper volume of molten metal or alloy needed to fill the die cavity. The plug is advanced toward the die cavity as the plunger pressure injects the molten metal or alloy in the die cavity. The plug is moved by advancement of the plunger into a plug-receiving chamber out of the way of the die cavity so as not to interfere with injection of the molten metal or alloy in the die cavity.

[0009] In the die casting of an oxygen reactive molten metal or alloy having a melting point greater than about 2000 degrees F, the shot sleeve and the plunger, or optional disposable plunger tip, contacting the molten metal or alloy can be made of an iron based material, such as H-13 tool steel, a refractory material such as Mo based alloy or TZM alloy, ceramic material such as alumina, or combinations thereof.

[0010] Details of the present invention will become more readily apparent from the following detailed description taken with the following drawings.

DESCRIPTION OF THE DRAWINGS

[0011]

Figure 1 is a side elevation, partially in section, of die casting apparatus for practicing an embodiment of the present invention with the shot sleeve vacuum chamber shown broken away.

Figure 2 is an enlarged elevational view of the stationary die showing a vacuum O-ring seal disposed in a groove in the die to seal against the other die when the dies are closed to isolate the die cavity

from ambient air atmosphere.

Figure 3 is a side elevation, partially in section, of another die casting apparatus for practicing another embodiment of the present invention wherein a floating plug is positioned in a longer shot sleeve prior to introduction of molten metal or alloy therein.

DETAILED DESCRIPTION OF THE INVENTION

[0012] Referring to Figures 1-2, die casting apparatus in accordance with an embodiment of the present invention is shown for die casting a metal or alloy such as especially titanium and titanium based alloys that are highly reactive with oxygen, under relatively high vacuum conditions in the die cavity despite the dies being disposed exteriorly in ambient air atmosphere. The apparatus also can be used to die cast nickel, cobalt base and other superalloys, iron based alloys such as stainless steels, and other metals or alloys under relatively high vacuum conditions in the die cavity.

[0013] The die casting apparatus comprises a base 10 which defines therein a reservoir 10a for hydraulic fluid that is used by hydraulic actuator 12 to open and close the fixed and movable die platens 14, 16. The platen 16 is disposed for movement on stationary tie bars or rods 18 and has a die 34 disposed thereon. A die clamping linkage mechanism 20 is connected to the movable die platen 16 in conventional manner not considered part of the present invention to open/close the movable die 34 relative to fixed die 32 disposed on platen 14. For example, a conventional die casting machine available as 250 ton HPM #73-086 from HPM, Cleveland, Ohio, includes such a base 10, actuator 12, and die platens 14, 16 mounted on tie bars 18 and opened/closed by die clamping linkage mechanism 20 in the manner described. The die casting machine includes a gas accumulator 21 for rapid feeding of hydraulic fluid to the plunger mechanism.

[0014] The die casting apparatus comprises a tubular, horizontal shot sleeve 24 that communicates to a die cavity 30 defined by the dies 32, 34 disposed on the respective die platens 14, 16. One or more die cavities can be formed by dies 32, 34 to die cast one or more components. The shot sleeve 24 has an discharge end section 24a that communicates with the entrance passage or gate 36 to the one or more die cavities 30 so that molten metal or alloy can be pressure injected therein. The entrance passage or gate 36 can be machined in the stationary die 32 or the movable die 34, or both.

[0015] The discharge end section 24a of the shot sleeve 24 extends through a suitable passage 24b in the stationary platen 14 and die 32 as illustrated in Figure 1.

[0016] The shot sleeve 24 extends through die 32 into a vacuum melting chamber 40 where the metal or alloy to be die cast is melted under relatively high conditions

such as less than 1000 microns required by titanium and its alloys, such as Ti-6Al-4V, which are highly reactive to oxygen in ambient air at elevated temperatures. The vacuum chamber 40 is defined by a vacuum housing wall 42 that extends about and encompasses or surrounds the opposite charging end section of the shot sleeve 24 receiving the plunger 27 and the plunger hydraulic actuator 25. The vacuum chamber 40 is evacuated by a conventional vacuum pump P connected to the chamber 40 by a conduit 40a. The base 10 and the vacuum housing wall 42 rest on a concrete floor or other suitable support.

[0017] The chamber wall 42 is airtight sealed with the fixed platen 14 by a peripheral airtight seal(s) 43 located therebetween so as to sealingly enclose the shot sleeve 24 and a pair of side-by-side stationary, horizontal shot sleeve/plunger support members 44 (one shown) extending through chamber wall 42. Such shot sleeve/plunger support members are provided on the aforementioned conventional die casting machine (250 ton HPM #73-086).

[0018] A plunger 27 is disposed in the shot sleeve 24 for movement by plunger actuator 25 and plunger connector rod 27b between a start injection position located to the right of a melt entry or inlet opening 58 in shot sleeve 24 and a finish injection position proximate the die entrance gate 36. The melt inlet opening 58 communicates to a metal (e.g. steel) melt-receiving vessel 52 mounted adjacent the fixed platen 14 on the shot sleeve 24 by clamps, such as screw clamps (not shown). The melt-receiving vessel 52 is disposed beneath a melting crucible 54 to receive a charge of molten metal or alloy therefrom for die casting.

[0019] The melting crucible 54 may be a conventional induction skull crucible comprising copper segments in which a charge of solid metal or alloy to be die cast is charged via vacuum port 40b and melted by energization of induction coils 56 disposed about the crucible in conventional manner in the chamber 40. Known ceramic or refractory lined crucibles also can be used in practicing the present invention. The crucible 54 can be tilted by rotation about crucible trunnions T using a conventional hydraulic, electrical or other actuator (not shown) disposed outside the vacuum chamber 40 and connected to the crucible by a suitable vacuum sealed linkage extending from the actuator to the crucible. The crucible is tilted to pour the molten metal or alloy charge into the melt-receiving vessel 52, which is communicated to the shot sleeve 24 via opening 58 in the shot sleeve wall. The molten metal or alloy charge is introduced through opening 58 into the shot sleeve 24 in front of the plunger tip 27a.

[0020] In practicing an embodiment of the present invention, the molten metal or alloy charge is introduced into the shot sleeve in an amount that is less than 40 volume % of the effective internal volume of the shot sleeve defined in front of the plunger tip 27a and extending to the entrance or gate 36 of the die cavity. Prefera-

bly the amount of molten metal or alloy occupies less than 20 volume %, and even more preferably from about 8 to about 15 volume %, of the effective internal volume of the shot sleeve. Such a relatively low volume of molten charge relative to the shot sleeve internal volume provides a relatively low molten charge profile in the shot sleeve (i.e. the molten charge lies more along the bottom of the shot sleeve) to thereby reduce the contact area and contact time of the high temperature molten charge with the plunger tip 27a and resultant swelling of the plunger tip prior to melt injection into the mold cavity.

[0021] The plunger 27 is moved from the start injection position to the finish injection position by a conventional hydraulic actuator 25 that, for example, is provided on the aforementioned conventional die casting machine (250 ton HPM #73-086). Typical plunger speeds are in the range of 50 to 300 feet/second. Radial clearances between the shot sleeve 24 and the plunger tip 27a are in the range of about 0.0005 inch to 0.020 inch. A preferred radial clearance between the shot sleeve 24 and the plunger tip 27a is about 0.008 inch.

[0022] In die casting titanium, titanium based alloys, nickel base superalloys, and iron based alloys, the shot sleeve 24 and forward plunger tip 27a contacting the molten metal or alloy can be made of an iron based material, such as H-13 tool steel, or a refractory material such as based on Mo alloy or TZM alloy, ceramic material such as alumina, or combinations thereof that are compatible with the metal or alloy being melted and die cast. The plunger tip 27a can comprise a disposable tip that is thrown away after each molten metal or alloy charge is injected in the die cavity 30. A disposable plunger tip can comprise a copper based alloy such as a copper-beryllium alloy (e.g. D340 alloy), which is especially suitable for die casting A380 aluminum alloy.

[0023] In die casting titanium, titanium based alloys, nickel base superalloys, and iron based alloys, the dies 32, 34 can be made of steel and/or titanium pursuant to Colvin U.S. Patent 5 287 910, although other die materials may be used in practicing the invention.

[0024] Referring to Figure 1, the first and second dies 32, 34 are disposed outside the vacuum melting chamber 40 in ambient air atmosphere. That is, exterior surfaces or sides of the dies 32, 34 are exposed to ambient air atmosphere.

[0025] Pursuant to the present invention, when the dies 32, 34 are closed, the die cavity 30 defined therebetween is communicated to the vacuum chamber 40 via the shot sleeve 24 and can be evacuated through the shot sleeve.

[0026] The stationary die 32 typically includes one or more grooves 32a on its inner face 32b (on groove shown in Figure 2) that mates with the opposing inner face of the movable die 34 when the dies are closed. The groove(s) 32a encircle and extend about the die cavity 30 as well as gate 36 and a melt discharge opening communicated to gate 36 and defined by shot sleeve end 24a. The groove 32a receives a resilient, reusable high

temperature O-ring vacuum seal 60 for sealing in vacuum tight manner against the mating face of the movable die 34 when the dies are closed. Alternately, the seal(s) 60 can be disposed in grooves on the mating face of the movable die 34, or they can be disposed on the mating faces of both dies 32, 34, so as to form a vacuum tight seal about and isolating the die cavity 30, gate 36 and shot sleeve end 24a from the ambient air atmosphere surrounding the exterior of the dies 32, 34 when closed. A series of several grooves and O-ring seals can be provided progressively outwardly relative to the die cavity perimeter to form a plurality of vacuum tight seals. The vacuum seals 60 may comprise Viton material that can withstand temperatures as high as 400 degrees F that may be present when the die cavity 30 is filled with molten metal or alloy.

[0027] By use of vacuum seals 60, the die cavity 30 is isolated from the ambient air atmosphere when the dies 32, 34 are closed and enables the die cavity 30 to be evacuated through the shot sleeve 24 when the vacuum melting chamber 40 is evacuated to high vacuum levels of less than 1000 microns employed for melting the solid charge in the crucible 54.

[0028] In operation of the die casting apparatus of Figure 1, a solid metal or alloy is charged into the crucible 54 in the vacuum melting chamber 40 via port 40b. The vacuum chamber 40 then is evacuated to a suitable level for melting the particular charge (such as less than 100 microns; e.g. 90 microns, for titanium and its alloys such as Ti-6Al-4V alloy, nickel base superalloys, and stainless steels) by vacuum pump P. The die cavity 30 formed by the closed dies 32, 34 is concurrently evacuated to the same vacuum level through the connection to the vacuum melting chamber 40 via the shot sleeve 24 and by virtue of being isolated from surrounding ambient atmosphere by the vacuum seal(s) 60.

[0029] The molten charge of the metal or alloy in crucible 54 is poured under vacuum into the shot sleeve 24 via the vessel 52 and melt inlet opening 58 with the plunger 27 initially positioned at the start injection position of Figure 1. As mentioned above, the molten metal or alloy charge is introduced into the shot sleeve in an amount that is less than 40 volume % of the effective internal volume of the shot sleeve. Preferably the amount of molten metal or alloy occupies less than 20 volume %, and even more preferably from about 8 to about 15 volume %, of the effective internal volume of the shot sleeve. The molten metal or alloy is poured into the shot sleeve 24 and resides therein for a preselected dwell time of between 0.005 seconds and 4 seconds, typically only 0.1 second to 1.5 seconds, for the purpose of insuring that no molten metal gets behind the plunger 27. The melt can be poured directly from the crucible 54 via vessel 52 into the shot sleeve 24, thereby reducing time and metal cooling before injection can begin.

[0030] The plunger 27 then is advanced in the shot sleeve 24 by actuator 25 to pressure inject the molten metal or alloy into the die cavity 30 via entrance pas-

sage or gate 36. The molten metal or alloy is forced at high velocities, such as up to 150 inches per second, down the shot sleeve 24 and into sealed, evacuated die cavity 30.

[0031] After the molten metal or alloy has been injected, the dies 32, 34 are opened by movement of die 34 relative to die 32 within a typical time period that can range from 5 to 25 seconds following injection to provide enough time for the molten metal or alloy to form at least a solidified surface on the die cast component(s). The dies 32, 34 then are opened to allow ready removal of the die cast component(s) from the dies. A conventional ejector pin mechanism (not shown) provided on the aforementioned HPM die casting machine and not forming a part of the invention helps eject the die cast component(s) from the dies. Removal of the die cast component(s) can be made directly from the dies 32, 34 simply by opening the dies without further cooling of the cast component(s). This is advantageous to increase production output of die cast components. When the dies are opened, the vacuum seal(s) 60 is/are broken, and the cast component(s) is/are exposed to ambient air atmosphere and optionally can be quenched in a quenchant medium M, such as water, oil and the like, located proximate the open dies 32, 34.

[0032] Referring to Figure 3 wherein like or similar features are represented by like reference numerals, the present invention envisions in another embodiment placing a floating plug 70 in a longer shot sleeve 24 prior to introduction of the metal or alloy from crucible 54. The plug 70 initially is located downstream of the melt inlet opening 58 to improve filling of the shot sleeve 24 between the plug 70 and the plunger tip 27a with the proper volume of molten metal or alloy needed to fill the die cavity 30.

[0033] The plug 70 is advanced toward the die cavity 30 as the plunger 27 pressure injects the molten metal or alloy in the die cavity 30. The plug 70 is moved by advancement of the plunger 27 into a plug-receiving chamber 72 formed in the movable die 34 out of the way of the die cavity entrance passage 36 so as not to interfere with injection of the molten metal or alloy in the die cavity. The plug 70 can comprise steel for titanium and its alloys and other high melt temperature metal which is resistant to reaction with the particular molten metal being die cast. The plug 70 is dimensioned such that it will stay in place during sleeve filling with molten metal from the vessel 52 and remain ahead of the injected metal until it rests in chamber 72.

[0034] In practicing the embodiments of the invention described above, the temperature of the dies 32, 34 can be controlled within desired ranges to provide die temperatures in the range of 100-700 degrees F. For example, the dies 32, 34 can be preheated prior to the start of injection of molten metal or alloy therein by one or more conventional gas flame burners or electrical resistance heating wires operably associated with the dies to this end. The dies 32, 34 can be cooled by water cooling

conduits (not shown) formed internally of the dies and through which cooling water is circulated to control die temperature as die cast components continue to be made and the dies heat up. The shot sleeve 24 similarly also optionally can be heated or cooled to control shot sleeve temperature within a desired range such as 100-700 degrees F by similar gas flame burners or electrical resistance wires or water cooling passages in the shot sleeve.

[0035] For die casting of Ti and titanium alloy parts pursuant to an embodiment of the present invention, a charge of molten titanium or an alloy thereof, such as Ti-6Al-4V, comprising from 5 to 10 pounds of melt at a melt temperature typically equal to the metal or alloy melting point plus 50 degrees F (e.g. about 3080 degrees F for Ti-6Al-4V) can be introduced into shot sleeve 24 having a length of 16.5 inches and diameter of 3 inches. The molten charge occupies about 9-10 volume % of the effective internal volume of shot sleeve 24, which includes therein a copper-beryllium plunger tip having a radial clearance of 0.002 inch with the shot sleeve. The plunger moves at a minimum of 125 inches per second to inject the charge into the die cavity defined between the dies 32, 34 which can be preheated to 300 degrees F. Nickel base superalloys can be die cast pursuant to the invention using similar parameters with a melt temperature equal to the alloy melting point plus 75 degrees F. Stainless steel 17-4 PH can be die cast pursuant to the invention using similar parameters with a melt temperature equal to the alloy melting point plus 25 degrees F.

[0036] The invention can be used to die cast complex shaped or configured components such as gas turbine compressor vanes and blades made of nickel base superalloys, such as for example only IN 718 nickel base superalloy, for the compressor section of a gas turbine engine as well as golf club putters made of stainless steel, such as 17-4 PH stainless steel and amorphous alloys, as well as a wide variety of other components.

[0037] From the above it can be seen that the present invention also relates to a method of die casting titanium or an alloy thereof, said method comprising

(a) melting titanium or an alloy thereof in a vacuum chamber communicated to a die cavity by a shot sleeve to form a melt, evacuating the vacuum chamber and the die cavity through the shot sleeve to less than 1000 microns while sealing the die cavity from ambient air atmosphere by vacuum seal means between said dies,

(b) introducing the melt into the shot sleeve in an amount less than about 20 volume % of the effective internal volume of the shot sleeve,

(c) advancing the plunger toward the die cavity to pressure inject the melt into the sealed, evacuated

die cavity to form a die cast component, and

(d) opening the dies to remove the die cast component from the die cavity directly to ambient air atmosphere.

[0038] Preferably, the melt is introduced into the shot sleeve in an amount of about 8 to about 15 volume % of the effective internal volume of the shot sleeve.

Claims

1. Die casting apparatus, comprising:

a) first and second dies that are disposed in ambient air atmosphere and define a die cavity therebetween when the dies are closed, including a vacuum seal between said dies to isolate said die cavity from the ambient air atmosphere when said dies are closed,

b) a shot sleeve communicated at one end to the die cavity and having another end with a melt inlet communicated to a vacuum chamber,

c) a melting vessel disposed in the vacuum chamber for melting a metal or alloy that is introduced through said melt inlet into said shot sleeve ahead of a plunger that is movable in said shot sleeve,

d) means for evacuating the vacuum chamber when the molten metal or alloy is melted in said melting vessel such that said die cavity is concurrently evacuated through said shot sleeve by virtue of said die cavity being isolated from ambient atmosphere by said vacuum seal,

e) said plunger being movable in said shot sleeve to inject the molten metal or alloy into said die cavity, and

f) means for opening the dies after the molten metal or alloy is injected therein to permit removal of a die cast component from the die cavity directly into the ambient air atmosphere.

2. The apparatus of claim 1 wherein said vacuum seal comprises O-ring seal on at least one die and extending about the die cavity, a gate and a melt discharge opening communicated to said gate.

3. The apparatus of claim 1 wherein said vacuum chamber and die cavity are evacuated to less than 1000 microns.

4. The apparatus of claim 1 wherein radial clearance between the plunger and shot sleeve is between

about 0.0005 inch and 0.020 inch.

5. The apparatus of claim 1 wherein said melting vessel introduces a charge of the molten metal or alloy that occupies less than 40 volume % of the effective internal volume of the shot sleeve.

6. The apparatus of claim 5 wherein the charge of the molten metal or alloy occupies about 8 to about 15 volume % of the effective internal volume of the shot sleeve.

7. The apparatus of claim 1 further including a plug disposed in said shot sleeve downstream of said melt inlet, said plug being moved by plunger movement through said shot sleeve toward said die cavity.

8. The apparatus of claim 7 wherein one of said dies includes a chamber for receiving said plug when said molten metal or alloy is injected in said die cavity.

9. The apparatus of claim 1 wherein said shot sleeve and said plunger comprise a material selected from the group consisting of an iron based material, a refractory material, and ceramic material and combinations thereof.

10. The apparatus of claim 1 wherein said plunger includes a disposable plunger tip.

11. The apparatus of claim 1 wherein the plunger tip comprises a copper based alloy.

12. The apparatus of claim 1 including means for controlling the temperature of at least one of said dies and said shot sleeve.

13. The apparatus of claim 1 wherein said vessel is disposed adjacent a fixed die platen.

14. A method of die casting a reactive metal or alloy, comprising

a) melting a reactive metal or alloy in a vacuum chamber communicated to a die cavity defined by dies disposed in ambient atmosphere by a shot sleeve,

b) evacuating the vacuum chamber and the die cavity through the shot sleeve while sealing the die cavity from ambient air atmosphere by one or more vacuum seals between said dies,

c) introducing the melted reactive molten metal or alloy into the shot sleeve ahead of a plunger in an amount less than about 40 volume % of

the effective internal volume of the shot sleeve,

d) advancing the plunger toward the die cavity to inject the reactive molten metal or alloy into the sealed, evacuated die cavity to form a die cast component, and 5

e) opening the sealed dies to remove a die cast component from the die cavity directly to ambient air atmosphere. 10

15. The method of claim 14 wherein the reactive metal or alloy is selected from the group consisting of titanium, titanium alloy, superalloy, superalloy, and stainless steel. 15

16. The method of claim 14 including the additional step of quenching the die cast component in a quench medium after removal from the dies. 20

17. The method of claim 14 wherein the melted reactive molten metal or alloy is introduced into the shot sleeve in an amount less than about 20 volume % of the effective internal volume of the shot sleeve. 25

18. The method of claim 14 wherein the melted reactive molten metal or alloy is introduced into the shot sleeve in an amount of about 8 to about 15 volume % of the effective internal volume of the shot sleeve. 30

19. The method of claim 14 including placing a plug in the shot sleeve ahead of the plunger prior to introduction of the molten metal or alloy and advancing the plug toward the dies with the molten metal or alloy between said plug and said plunger. 35

20. The method of claim 19 including advancing the plug into a chamber formed in one of said dies in a manner not to interfere with injection of the molten metal or alloy in the die cavity. 40

21. The method of claim 14 wherein the vacuum chamber and the die cavity are evacuated to less than 1000 microns when the reactive metal or alloy is selected from oxygen reactive titanium and titanium based alloy. 45

50

55

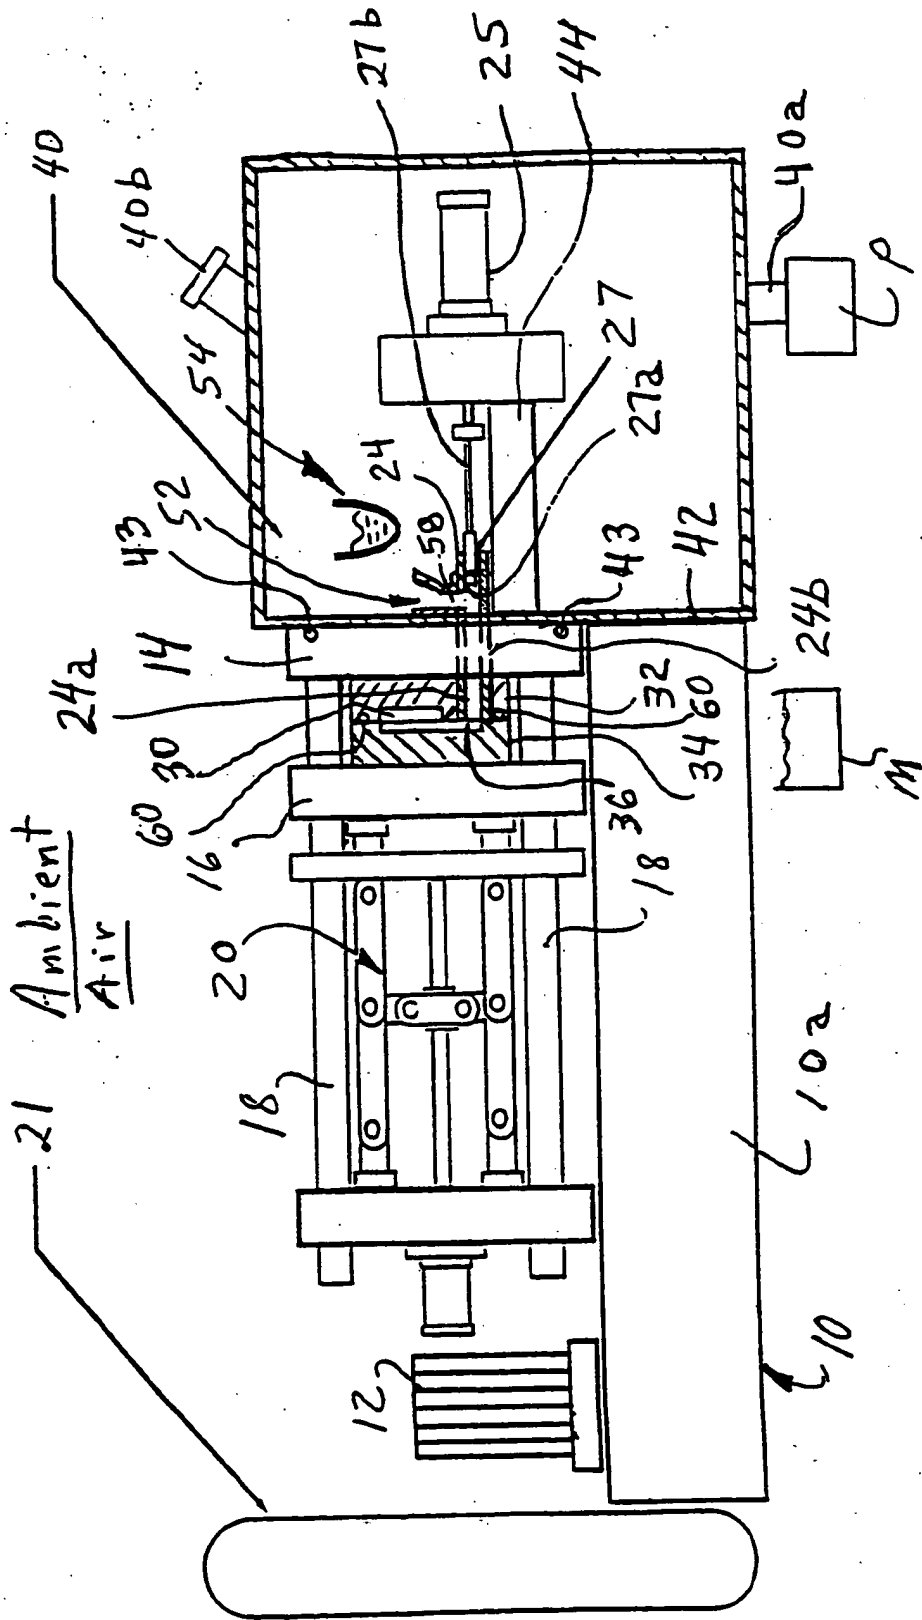


Figure 1

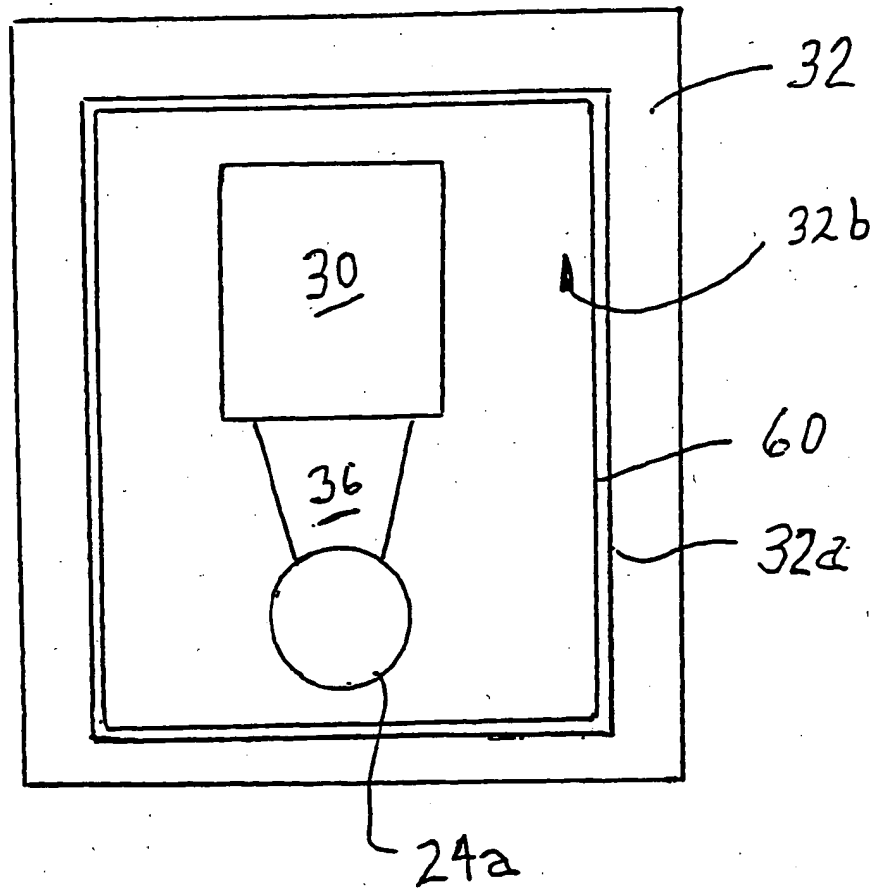


Figure 2.

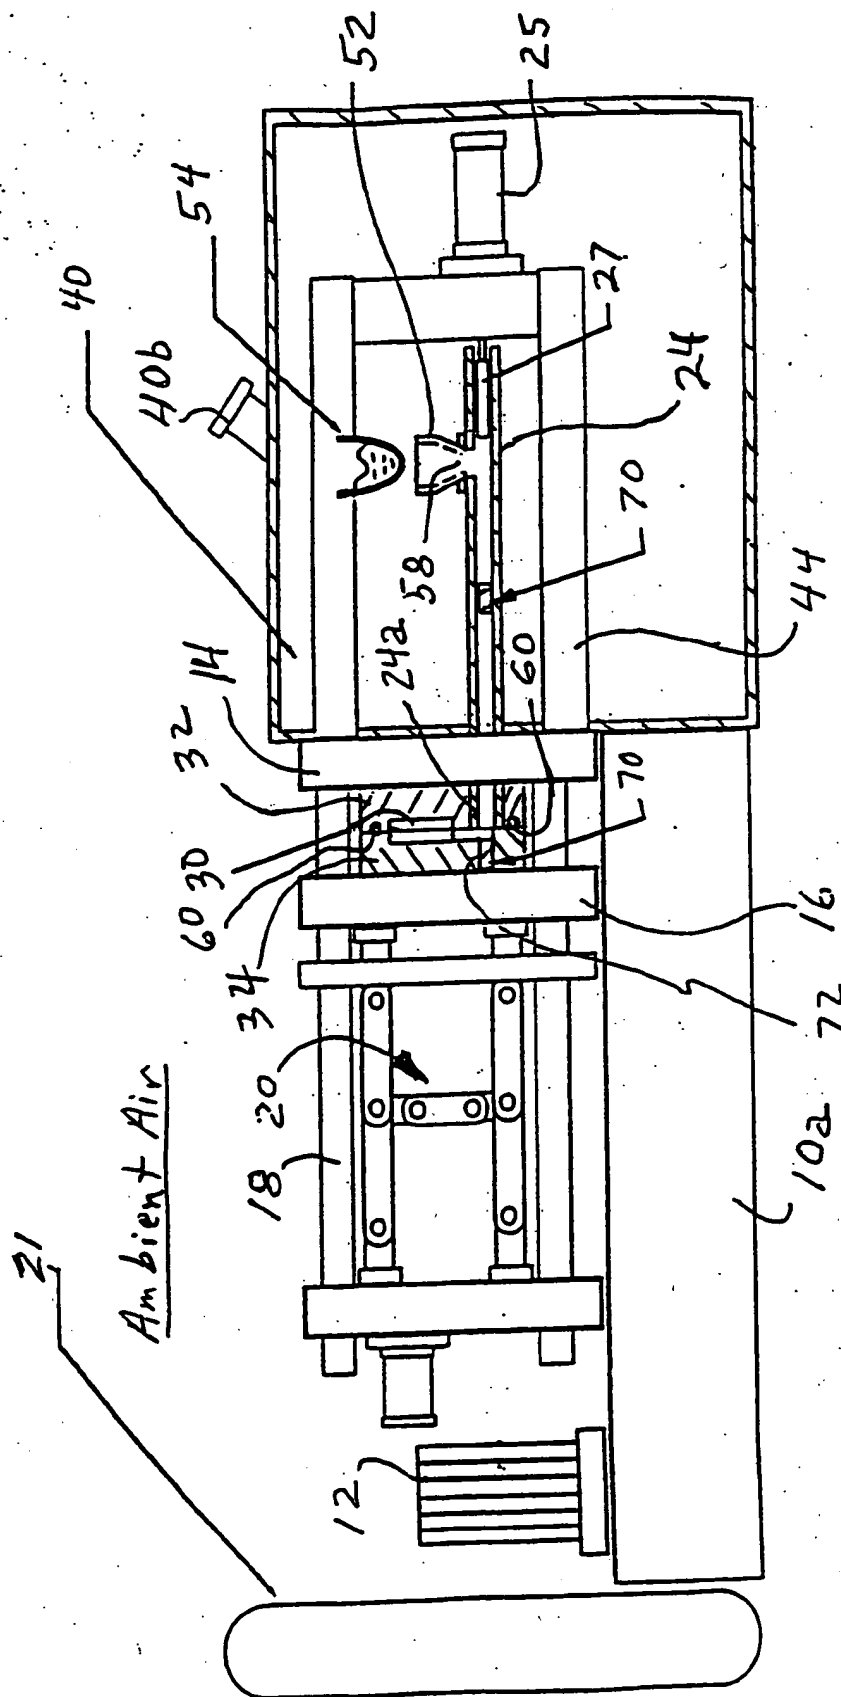


Figure 3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 11 5778

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 4 154 286 A (FILIPPOV DMITRY A ET AL., MOSCOW, RU) 15 May 1979 * column 1, line 6 - line 12 * * column 3, line 53 - column 5, line 51 * * figure 1 *	1,13,14, 21	B22D21/00 B22D17/14
A	AU 514 829 B (GLAZUNOV S G; KHRONOV A M; MERKULOV V V; KRJUCHKOV I B KLIMOV N E; RU) 26 February 1981 * page 2, line 1 - line 5 * * page 5, line 7 - page 8, line 11 * * figure 1 *	1,13,14, 21	
A	DE 43 10 755 A (DRUCKGUSSWERK MOESSNER GMBH WEERDOHL, WERDOHL, DE) 6 October 1994 * column 2, line 57 - column 3, line 16 * * column 3, line 32 - column 4, line 54 * * figure 1 *	1,7,14, 19-21	
A	EP 0 790 090 A (MUELLER WEINGARTEN AG, WEINGARTEN, DE) 20 August 1997 * column 3, line 46 - column 4, line 32 * * figure 1 *	1,14	TECHNICAL FIELDS SEARCHED (Int.Cl.6) B22D
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 278 (M-1268), 22 June 1992 & JP 04 071763 A (KEIHIN SEIKI MFG CO LTD), 6 March 1992 * abstract *	1,14	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 December 1998	Examiner Peis, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 11 5778

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-12-1998

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4154286	A	15-05-1979	DE	2802428 A	26-07-1979
AU 514829	B	26-02-1981	AU	3247078 A	26-07-1979
DE 4310755	A	06-10-1994	NONE		
EP 0790090	A	20-08-1997	DE	19605727 A	21-08-1997